SUPPLIMENT 1 NOTES ON THE RS-232C OPTION BOARD

The Sanyo MBC-770 series compuer is equipped with two slots for option boards to be installed.

After removing the upper body and the top plate, you will find the two slots on the I/O board. When installing the RS-232C option board make sure to install it into the right-hand slot when seen from the rear.
The RF shield on the rear panel must be removed before the installation.

Refer to the illustrations below.

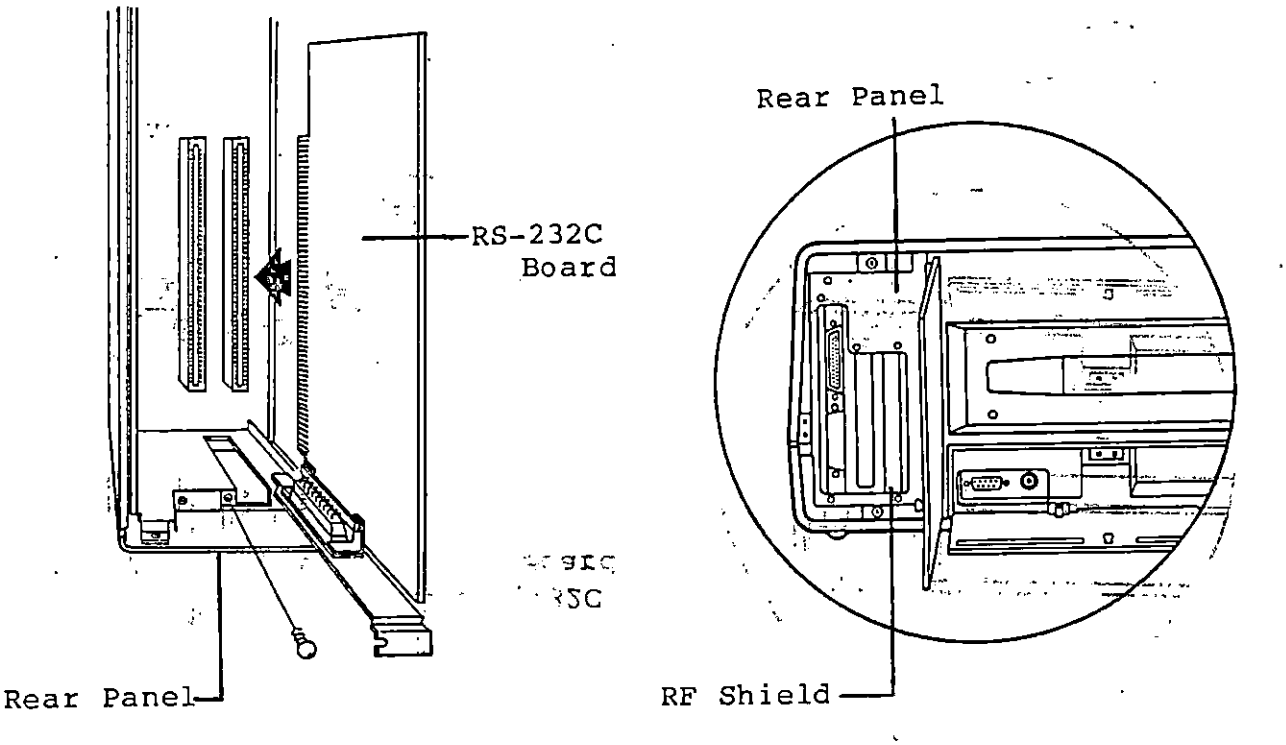

In order to remove the upper body and the top plate, refer to Upper Body Removal and Top Plate Removal in Chapter 7.

For option board installation, make sure to turn the system power off beforehand.

SUPPLIMENT 2 ERRORS AND CORRECTIONS

Page 6-9 7 Out of memory
Error : There is more room in memory to execute.....
Correction : There is no more room in memory to execute....